




Community Design No: 000235429
 UK Registered Design No: 2098802

Features / Benefits

- Twin operator option for 30KDK
- Long run fuel tank, up 30 hours
- Unique Brendon Live Hose Reel
 - Prolongs the life of the hose
 - Enables quick and easy rewinding
 - Keeps the unit compact
- Heavy Duty V-Belt Drive
 - Prolongs engine and pump life
- Suction or Direct Feed
- Triple Piston Cat Pump
- Water Cooled Kubota Diesel Engine

	30KDK	50KDK
Max Pressure:	3000 PSI / 207 BAR	5000 PSI / 345 BAR
Volume:	6.0 GPM / 27 LPM	3.7 GPM / 17 LPM
Pump:	Triple piston Cat Pump	
Engine:	3 cylinder Water Cooled Kubota Diesel	
Drive:	Belt drive ensures long life on engine	
Supply:	Suction or Direct Feed	
Suction Hose:	4.5m 3/4" hose with stainless steel suction strainer	
Delivery Hose:	15m 3/8" braided with Quick Screw adaptor	
Gun:	With swivel coupling and Quick Screw adaptor	
Lance:	1m two piece stainless steel lance	
Nozzle:	30KDK - NZ1508 / 50KDK - NZ1504	
Fuel Consumption:	Approx 1.50 ltr/hr	
Weight & Dimensions:	295kg 1130mm x 1000mm x 900mm	
Thermo-sensor valve:	Protects pump from re-circulation overheat	
Chemical System:	Metered high pressure chemical system with chemical inlet hose and filter (only operates with suction feed)	

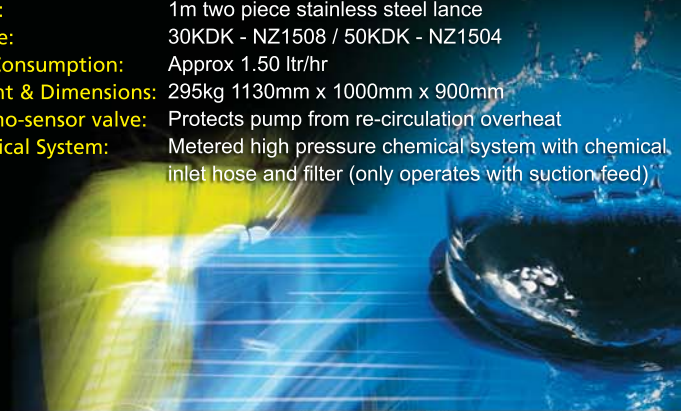

Specification may differ per country. Brendon reserves the right to alter the specification without notice.



Sandblasting

Drain Jetting

Mobile Reel

Gulper Kit