




Community Design No: 000235429
 UK Registered Design No: 2098802

Features / Benefits

- 5000 PSI / 340 Bar - 3.7 GPM 17 LPM
- Lister LPW3 24 HP Water Cooled Engine
- Electric Start
- 57 Gallon On board Water Storage
- Quality CAT pump
- Silenced Protective Canopy.
- Variable Speed/Pressure
- Overheat Protection
- Low Water Run Dry Protection
- Large Capacity Water Inlet Hose Reel C/w 20m Inlet Hose
- Large Capacity Live Manual Hose Reel C/w 30m Hose

FTJ3050LV	
Max Pressure:	5000 PSI / 340 BAR
Volume:	3.7 GPM / 17 LPM
Pump:	Triple piston Cat Pump
Engine:	Water cooled LPW3 Lister Diesel
Drive:	Belt drive ensures long life on engine
Supply:	Suction or Direct Feed
Suction Hose:	20m inlet hose mounted on a large capacity reel
Delivery Hose:	30m 3/8" double braided delivery hose
Gun:	With swivel coupling and Quick Screw adaptor
Lance:	1m two piece stainless steel lance
Nozzle:	NZ1504
Fuel Consumption:	Approx 5 ltr/hr (Tank capacity 38.6ltr)
Weight & Dimensions:	1500kg 3450mm x 1600mm x 1400mm
Thermo-sensor valve:	Protects pump from re-circulation overheat
Chemical System:	Metered high pressure chemical system with chemical inlet hose and filter (only operates with suction feed)

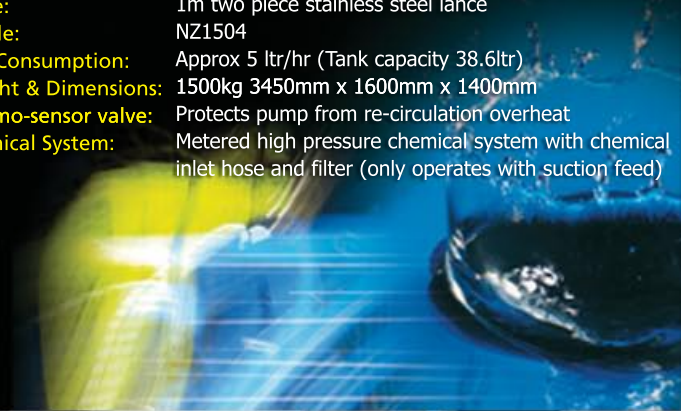

Specification may differ per country. Brendon reserves the right to alter the specification without notice.



Sandblasting

Drain Jetting

Mobile Reel

Gulper Kit